

STARSTRIP™ SERIES

STARSTRIP™

STARSTRIP™ -24-RGB IP67

Features

- RGB color-changing LED strip
- Encapsulated in silicone resin
- Waterproof rating: IP67
- Beam angle: 120°
- High brightness and long operating life
- Common anode configuration
- Maximum length can be extended using the SS-COUPLER™
- RoHS Compliant



The STARSTRIP™ -24-RGB IP67 is ideal for amusement park or theater lighting, auditorium walkways, stairway accent lighting, ceiling cornices and wall washing

Available lengths: 32, 62, 92 and 122 cm.


PRODUCT SPECIFICATIONS

Product Number:	STARSTRIP™ -24-RGB IP67
LED Type:	SMD RGB LED
Input Voltage:	24VDC
LED Luminous Intensity (Typ.):	R: 430mcd; G: 1000mcd; B: 230mcd
Emitting Color & Wavelength:	R: 622~630nm; G: 524~532nm; B: 464~472nm
Max. Watts/Unit:	3.4W
LED Quantity/Unit:	14 pcs
Unit Length:	32 cm
LED Spacing:	21.4 mm
Dimensions:	320mm x 21mm X 6.2mm
Beam Angle (Typ.):	120°
Color:	Any color available with RGB color mixing
Controller Model:	PAVO-DIAL-DMX or PAVO-IR-150
Max. units connected together:	20 units with the PAVO-DIAL-DMX Controller
Operation Temperature:	-20°C ~ 80°C
Power Supply: (Power Consumption for each meter = 10.2W)	15M: 153W/24VDC

Maximum lengths of the STARSTRIP-24-RGB IP67 that can be connected together

PRODUCT	PAVO-DIAL-DMX	PAVO-IR-150	SS-COUPLER	PDS4-DMX-200	PDS4-DMX-320
STARSTRIP-24-RGB	6 meters	6 meters	6 meters	19M (6M max/port)	24M (6M max/port)

DIMENSIONS

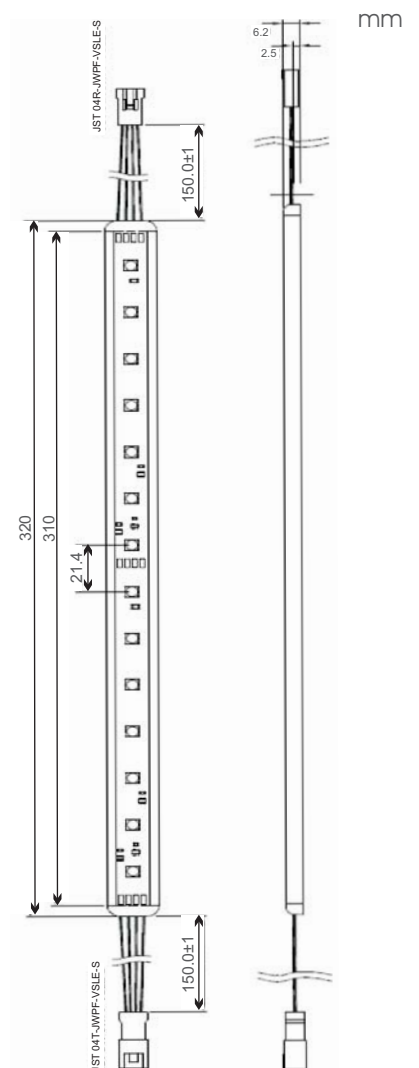

Ver: 20100409

Taiwan Operations: Color Stars, Inc.

10F, No. 566 Jung Jeng Rd. Sindian City
Taipei County 231, Taiwan, R.O.C.

Tel: +886-2-8667-6600 Fax: +886-2-8667-1400

Email: sales@colorstars.com Website: www.colorstars.com



Headquarters: ColorStars Group

One Technology Dr., Suite F-213
Irvine, CA 92618 USA

Tel: + (949) 336-6161; Fax: + (949) 336-6165

Email: sales@colorstars.com; Website: www.colorstars.com