

# T8 Series

## TRISTAR<sup>®</sup>-T8 LED Lights



TRISTAR-T8-2-WHT

Simply remove the starter and install the TRISTAR-T8 LED lights in traditional fluorescent fixtures. The magnetic ballast may be kept or by-passed. Do not use with electronic ballasts.

### TRISTAR-T8 LED Lights

#### Features

- High power LEDs
- High luminous intensity output
- Equal to or brighter than fluorescent lamps
- Min. 70% lumen maintenance after 35,000 hours
- Cool beam (no UV or thermal radiation)
- No mercury

### TRISTAR-T8 LED Lights

Parameter	TRISTAR-T8-2-WHT	TRISTAR-T8-4-WHT
Power Specifications		
Power Supply Voltage	100 ~ 240 Vac	
Power Supply Current	< 100 mA	< 200mA
Power Consumption	10W	20W
Operating Life	Minimum of 70% lumen maintenance after 35,000 hours.	
Dimension Specifications		
Length (mm)	580	1200
Diameter (mm)	30	30

### Models Available

Models	Color Temperature	Lumen Output
TRISTAR-T8-2-WHT-D	Daylight White: 5300 ~ 6500K	600 lm
TRISTAR-T8-4-WHT-D		1200 lm
TRISTAR-T8-2-WHT-W	Warm White: 2600 ~ 3300K	500 lm
TRISTAR-T8-4-WHT-W		1000 lm


#### Notes:

- 1 The power comes from both the L (line) and N (neutral) ends.
2. Use only with magnetic ballasts (first remove the starter).  
Do not use with electronic ballasts.

Ver: 091125

### Dimension Diagram

Unit: mm

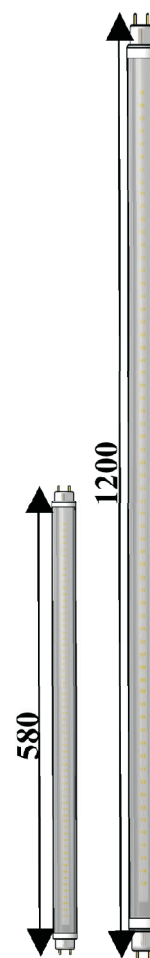

#### Taiwan Operations:

##### Color Stars, Inc.

10F, No. 566 Jung Jeng Rd. Sindian City  
Taipei County 231, Taiwan, R.O.C.

Tel: +886-2-8667-6600 Fax: +886-2-8667-1400

Email: sales@colorstars.com Website: www.colorstars.com



#### Headquarters:

##### ColorStars Group

One Technology Dr., Suite F-213  
Irvine, CA 92618 USA

Tel: + (949) 336-6161; Fax: + (949) 336-6165

Email: sales@colorstars.com; Website: www.colorstars.com